OPL

EVERIX® OPTICAL FILTERS

極薄・軽量
光学フィルター

Everixフィルターの魅力

100μm～の圧倒的な薄さ・軽さ

従来のガラスフィルターと比べて、とにかく薄くて軽いが特徴です。

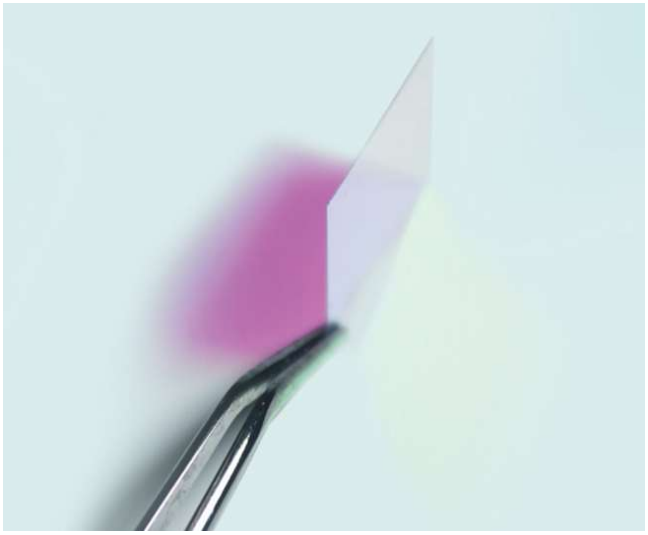

高い光学特性を樹脂で実現

高透過率・高ブロッキング・エッジの急峻差

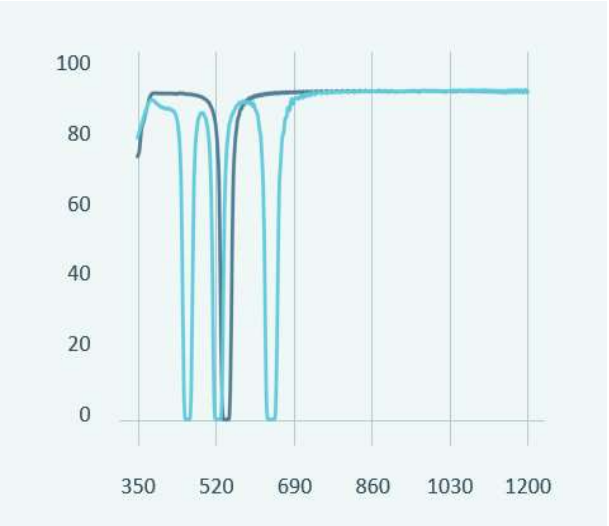

微細な形状にも加工可能

レーザー加工で任意のかたちに加工致します。

ドーム型＆カーブ型成型可能

曲面にも対応可能です。

製作方法

屈折率の異なる樹脂を重ね合わせ熱をかけて成型

干渉フィルターの薄膜の部分を樹脂で再現したフィルターです。

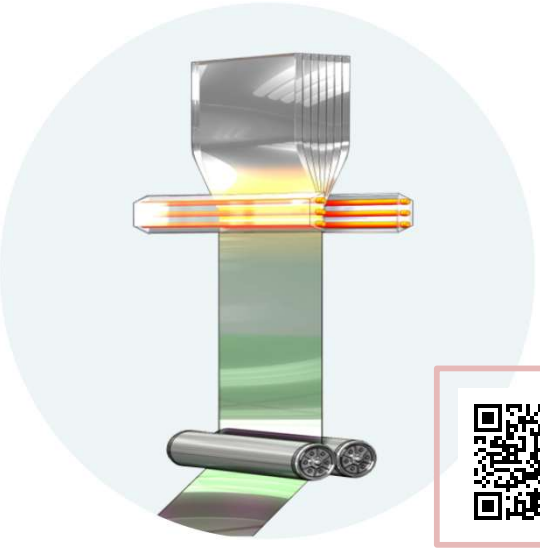

製造方法のイメージ動画が
ご覧いただけます。
https://www.youtube.com/watch?v=d77E3Af5xA0

これにより、従来より20倍薄く・60倍軽いフィルターが出来上がります。

対応市場

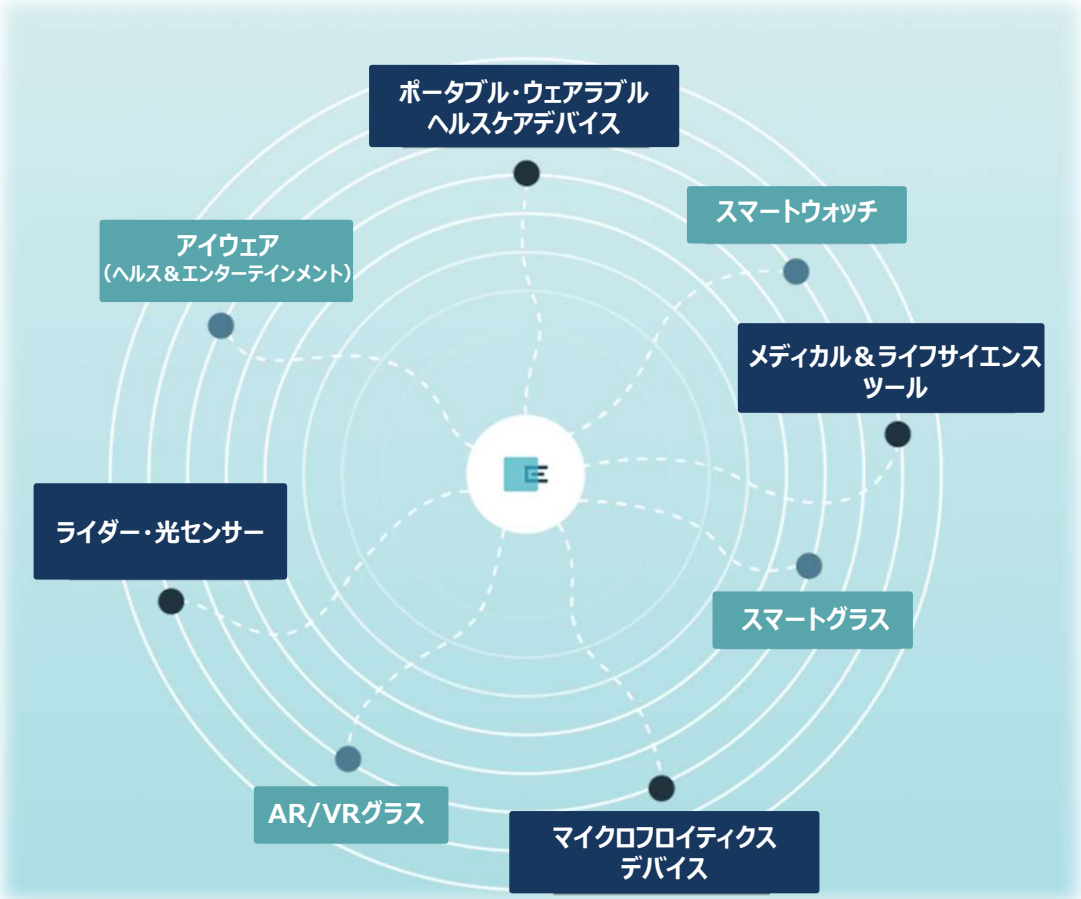

仕様/対応可能オプション

シングル/マルチノッチフィルター　Up to OD6

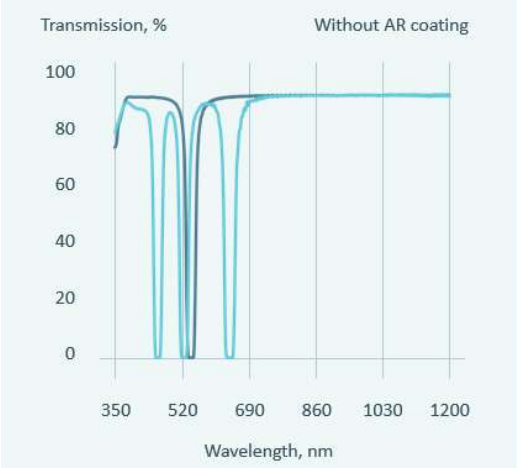

ロング/ショートパスフィルター　Up to OD6

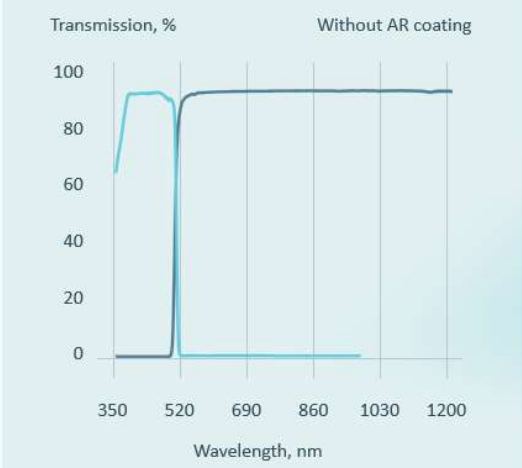

シングル/マルチバンドフィルター　Up to OD4

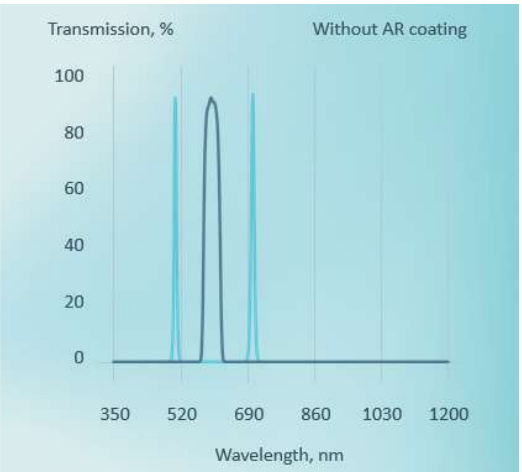

- 対応波長域：350nm～1800nm
- 最大透過率：90%
- ARコート：対応可（蒸着にて対応）
- ブロッキングOD値：OD2～OD6
- 厚み：100μm～500μm
- サイズ：□2.0mm～50.0mm
- 耐熱：～93℃
- 干渉＆吸収ハイブリッドフィルター対応可
- RoHS：対応

コンパクト
ウェアラブル機器や小型機器向けの超小型フィルターを実現

拡張性
数mmからご用途に合わせたサイズの提供が可能

カスタマイズ
ご希望仕様に合わせてフィルター製作が可能、装置の光学特性が向上します

■本社　埼玉県蕨市塚越4-12-38
TEL 048-420-5911　FAX 048-441-4071
■大阪営業所　大阪市淀川区宮原5丁目1-28新大阪八千代ビル別館
TEL 06-6398-6777　FAX 06-6398-6778
Email：opl@opto-line.co.jp

株式会社 オプトライン

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 10 nmタイプ）

型番一覧（半値幅 10 nmタイプ）

型番	仕様
005-001-1	CWL = 400 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 351-383 nm & 417-449 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-002-1	CWL = 405 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 356-388 nm & 422-455 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-003-1	CWL = 430 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 378-412 nm & 448-482 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-004-1	CWL = 450 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 396-432 nm & 469-505 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-005-1	CWL = 460 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 405-441 nm & 479-516 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-006-1	CWL = 470 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 413-451 nm & 489-527 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-007-1	CWL = 488 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 429-469 nm & 508-547 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-008-1	CWL = 500 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 440-480 nm & 520-560 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-009-1	CWL = 520 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 458-500 nm & 541-582 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-010-1	CWL = 532 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 469-511 nm & 553-596 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-011-1	CWL = 540 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 476-519 nm & 561-605 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-012-1	CWL = 550 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 485-529 nm & 572-616 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-013-1	CWL = 560 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 494-538 nm & 582-627 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-014-1	CWL = 580 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 511-558 nm & 603-649 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-015-1	CWL = 589 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 519-566 nm & 612-659 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-016-1	CWL = 600 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 529-577 nm & 623-671 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-017-1	CWL = 620 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 547-597 nm & 644-693 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-018-1	CWL = 632 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 558-608 nm & 656-707 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-019-1	CWL = 640 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 565-616 nm & 664-716 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

型番	仕様
005-020-1	CWL = 650 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 574-626 nm & 675-727 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-021-1	CWL = 660 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 583-635 nm & 685-738 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-022-1	CWL = 671 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 592-646 nm & 696-750 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-023-1	CWL = 700 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 618-674 nm & 726-782 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-024-1	CWL = 800 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 707-771 nm & 829-893 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-025-1	CWL = 810 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 716-781 nm & 839-904 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-026-1	CWL = 850 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 752-820 nm & 881-949 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-027-1	CWL = 905 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 801-873 nm & 937-1010 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-028-1	CWL = 940 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 832-907 nm & 973-1049 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-029-1	CWL = 1064 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 942-1027 nm & 1101-1186 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-030-1	CWL = 400 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 351-383 nm & 417-449 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-031-1	CWL = 405 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 356-388 nm & 422-455 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-032-1	CWL = 430 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 378-412 nm & 448-482 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-033-1	CWL = 450 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 396-432 nm & 469-505 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-034-1	CWL = 460 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 405-441 nm & 479-516 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-035-1	CWL = 470 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 413-451 nm & 489-527 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-036-1	CWL = 488 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 429-469 nm & 508-547 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-037-1	CWL = 500 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 440-480 nm & 520-560 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-038-1	CWL = 520 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 458-500 nm & 541-582 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

型番	仕様
005-039-1	CWL = 532 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 469-511 nm & 553-596 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-040-1	CWL = 540 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 476-519 nm & 561-605 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-041-1	CWL = 550 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 485-529 nm & 572-616 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-042-1	CWL = 560 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 494-538 nm & 582-627 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-043-1	CWL = 580 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 511-558 nm & 603-649 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-044-1	CWL = 589 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 519-566 nm & 612-659 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-045-1	CWL = 600 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 529-577 nm & 623-671 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-046-1	CWL = 620 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 547-597 nm & 644-693 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-047-1	CWL = 632 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 558-608 nm & 656-707 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-048-1	CWL = 640 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 565-616 nm & 664-716 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-049-1	CWL = 650 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 574-626 nm & 675-727 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-050-1	CWL = 660 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 583-635 nm & 685-738 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-051-1	CWL = 671 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 592-646 nm & 696-750 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-052-1	CWL = 700 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 618-674 nm & 726-782 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-053-1	CWL = 800 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 707-771 nm & 829-893 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-054-1	CWL = 810 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 716-781 nm & 839-904 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-055-1	CWL = 850 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 752-820 nm & 881-949 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-056-1	CWL = 905 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 801-873 nm & 937-1010 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-057-1	CWL = 940 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 832-907 nm & 973-1049 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 10 nmタイプ）

型番一覧（半値幅 10 nmタイプ）

型番	仕様
005-058-1	CWL = 1064 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 942-1027 nm & 1101-1186 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-059-1	CWL = 410 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 360-393 nm & 427-460 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-060-1	CWL = 415 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 365-398 nm & 433-466 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-061-1	CWL = 420 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 369-403 nm & 438-471 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-062-1	CWL = 436 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 383-418 nm & 454-489 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-063-1	CWL = 441 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 388-423 nm & 459-495 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-064-1	CWL = 455 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 400-437 nm & 474-510 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-065-1	CWL = 459 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 404-440 nm & 478-515 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-066-1	CWL = 467 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 411-448 nm & 486-524 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-067-1	CWL = 473 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 416-454 nm & 492-530 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-068-1	CWL = 480 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 422-461 nm & 500-538 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-069-1	CWL = 487 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 429-468 nm & 507-546 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-070-1	CWL = 491 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 432-471 nm & 511-550 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-071-1	CWL = 505 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 445-485 nm & 525-566 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-072-1	CWL = 509 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 448-489 nm & 529-570 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-073-1	CWL = 515 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 454-495 nm & 536-577 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-074-1	CWL = 535 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 471-514 nm & 556-599 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-075-1	CWL = 545 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 480-524 nm & 567-610 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-076-1	CWL = 569 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 502-547 nm & 591-637 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-077-1	CWL = 577 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 509-555 nm & 599-646 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-078-1	CWL = 610 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 538-587 nm & 633-682 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-079-1	CWL = 633 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 559-609 nm & 657-708 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-080-1	CWL = 635 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 560-611 nm & 659-710 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-081-1	CWL = 636 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 561-612 nm & 660-711 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-082-1	CWL = 647 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 571-623 nm & 672-723 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-083-1	CWL = 656 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 579-631 nm & 681-733 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-084-1	CWL = 676 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 597-651 nm & 701-756 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-085-1	CWL = 680 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 600-655 nm & 706-760 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-086-1	CWL = 690 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 609-664 nm & 716-771 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-087-1	CWL = 694 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 613-668 nm & 720-775 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-088-1	CWL = 710 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 627-684 nm & 736-793 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-089-1	CWL = 720 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 636-694 nm & 747-804 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-090-1	CWL = 730 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 645-703 nm & 757-815 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-091-1	CWL = 740 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 654-713 nm & 767-827 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-092-1	CWL = 750 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 663-723 nm & 778-838 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-093-1	CWL = 760 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 672-732 nm & 788-849 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-094-1	CWL = 766 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 677-738 nm & 794-855 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-095-1	CWL = 770 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 680-742 nm & 798-860 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-096-1	CWL = 780 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 689-752 nm & 809-871 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-097-1	CWL = 785 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 694-757 nm & 814-877 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-098-1	CWL = 790 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 698-761 nm & 819-882 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-099-1	CWL = 795 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 703-766 nm & 824-888 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-100-1	CWL = 820 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 725-791 nm & 850-915 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-101-1	CWL = 830 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 734-800 nm & 860-926 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-102-1	CWL = 840 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 743-810 nm & 870-938 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-103-1	CWL = 852 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 753-822 nm & 883-951 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-104-1	CWL = 855 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 756-825 nm & 886-954 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-105-1	CWL = 860 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 761-829 nm & 891-960 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-106-1	CWL = 870 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 769-839 nm & 901-971 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-107-1	CWL = 880 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 778-849 nm & 912-982 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-108-1	CWL = 890 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 787-858 nm & 922-993 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-109-1	CWL = 900 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 796-868 nm & 932-1004 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-110-1	CWL = 910 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 805-878 nm & 942-1015 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-111-1	CWL = 920 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 814-888 nm & 953-1026 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-112-1	CWL = 930 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 823-897 nm & 963-1037 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-113-1	CWL = 950 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 841-917 nm & 984-1060 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-114-1	CWL = 960 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 850-926 nm & 994-1071 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 10 nmタイプ）

型番一覧（半値幅 10 nmタイプ）

型番	仕様
005-115-1	CWL = 970 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 858-936 nm & 1004-1082 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-116-1	CWL = 990 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 876-955 nm & 1025-1104 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-117-1	CWL = 1000 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 885-965 nm & 1035-1115 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-118-1	CWL = 1050 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 930-1014 nm & 1087-1171 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-119-1	CWL = 1100 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 974-1062 nm & 1138-1226 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-120-1	CWL = 1150 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1019-1111 nm & 1190-1282 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-121-1	CWL = 1200 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1063-1159 nm & 1241-1337 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-122-1	CWL = 1250 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1108-1208 nm & 1293-1393 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-123-1	CWL = 1300 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1152-1256 nm & 1344-1448 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-124-1	CWL = 1350 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1197-1305 nm & 1396-1504 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-125-1	CWL = 1400 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1241-1353 nm & 1447-1559 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-126-1	CWL = 1450 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1286-1402 nm & 1499-1615 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-127-1	CWL = 1500 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1330-1450 nm & 1550-1670 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-128-1	CWL = 1550 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1375-1499 nm & 1602-1726 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-129-1	CWL = 1600 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1419-1547 nm & 1653-1781 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-130-1	CWL = 1650 nm ± 2%, FWHM = 10 nm ± 5 nm, OD2 Blocking ranges = 1464-1596 nm & 1705-1837 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-131-1	CWL = 410 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 360-393 nm & 427-460 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-132-1	CWL = 415 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 365-398 nm & 433-466 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-133-1	CWL = 420 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 369-403 nm & 438-471 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-134-1	CWL = 436 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 383-418 nm & 454-489 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-135-1	CWL = 441 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 388-423 nm & 459-495 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-136-1	CWL = 455 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 400-437 nm & 474-510 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-137-1	CWL = 459 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 404-440 nm & 478-515 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-138-1	CWL = 467 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 411-448 nm & 486-524 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-139-1	CWL = 473 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 416-454 nm & 492-530 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-140-1	CWL = 480 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 422-461 nm & 500-538 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-141-1	CWL = 487 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 429-468 nm & 507-546 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-142-1	CWL = 491 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 432-471 nm & 511-550 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-143-1	CWL = 505 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 445-485 nm & 525-566 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-144-1	CWL = 509 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 448-489 nm & 529-570 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-145-1	CWL = 515 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 454-495 nm & 536-577 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-146-1	CWL = 535 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 471-514 nm & 556-599 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-147-1	CWL = 545 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 480-524 nm & 567-610 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-148-1	CWL = 569 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 502-547 nm & 591-637 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-149-1	CWL = 577 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 509-555 nm & 599-646 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-150-1	CWL = 610 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 538-587 nm & 633-682 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-151-1	CWL = 633 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 559-609 nm & 657-708 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-152-1	CWL = 635 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 560-611 nm & 659-710 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-153-1	CWL = 636 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 561-612 nm & 660-711 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-154-1	CWL = 647 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 571-623 nm & 672-723 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-155-1	CWL = 656 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 579-631 nm & 681-733 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-156-1	CWL = 676 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 597-651 nm & 701-756 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-157-1	CWL = 680 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 600-655 nm & 706-760 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-158-1	CWL = 690 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 609-664 nm & 716-771 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-159-1	CWL = 694 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 613-668 nm & 720-775 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-160-1	CWL = 710 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 627-684 nm & 736-793 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-161-1	CWL = 720 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 636-694 nm & 747-804 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-162-1	CWL = 730 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 645-703 nm & 757-815 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-163-1	CWL = 740 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 654-713 nm & 767-827 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-164-1	CWL = 750 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 663-723 nm & 778-838 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-165-1	CWL = 760 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 672-732 nm & 788-849 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-166-1	CWL = 766 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 677-738 nm & 794-855 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-167-1	CWL = 770 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 680-742 nm & 798-860 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-168-1	CWL = 780 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 689-752 nm & 809-871 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-169-1	CWL = 785 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 694-757 nm & 814-877 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-170-1	CWL = 790 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 698-761 nm & 819-882 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-171-1	CWL = 795 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 703-766 nm & 824-888 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 10 nmタイプ）

型番一覧（半値幅 10 nmタイプ）

型番	仕様
005-172-1	CWL = 820 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 725-791 nm & 850-915 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-173-1	CWL = 830 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 734-800 nm & 860-926 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-174-1	CWL = 840 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 743-810 nm & 870-938 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-175-1	CWL = 852 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 753-822 nm & 883-951 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-176-1	CWL = 855 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 756-825 nm & 886-954 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-177-1	CWL = 860 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 761-829 nm & 891-960 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-178-1	CWL = 870 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 769-839 nm & 901-971 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-179-1	CWL = 880 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 778-849 nm & 912-982 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-180-1	CWL = 890 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 787-858 nm & 922-993 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-181-1	CWL = 900 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 796-868 nm & 932-1004 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-182-1	CWL = 910 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 805-878 nm & 942-1015 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-183-1	CWL = 920 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 814-888 nm & 953-1026 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-184-1	CWL = 930 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 823-897 nm & 963-1037 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-185-1	CWL = 950 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 841-917 nm & 984-1060 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-186-1	CWL = 960 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 850-926 nm & 994-1071 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-187-1	CWL = 970 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 858-936 nm & 1004-1082 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-188-1	CWL = 990 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 876-955 nm & 1025-1104 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-189-1	CWL = 1000 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 885-965 nm & 1035-1115 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
005-190-1	CWL = 1050 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 930-1014 nm & 1087-1171 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

型番	仕様
005-191-1	CWL = 1100 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 974-1062 nm & 1138-1226 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-192-1	CWL = 1150 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1019-1111 nm & 1190-1282 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-193-1	CWL = 1200 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1063-1159 nm & 1241-1337 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-194-1	CWL = 1250 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1108-1208 nm & 1293-1393 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-195-1	CWL = 1300 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1152-1256 nm & 1344-1448 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-196-1	CWL = 1350 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1197-1305 nm & 1396-1504 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-197-1	CWL = 1400 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1241-1353 nm & 1447-1559 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-198-1	CWL = 1450 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1286-1402 nm & 1499-1615 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-199-1	CWL = 1500 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1330-1450 nm & 1550-1670 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-200-1	CWL = 1550 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1375-1499 nm & 1602-1726 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-201-1	CWL = 1600 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1419-1547 nm & 1653-1781 nm, D = 12.5 ± 0.15 mm, CA > 90%
005-202-1	CWL = 1650 nm ± 2%, FWHM = 10 nm ± 5 nm, OD4 Blocking ranges = 1464-1596 nm & 1705-1837 nm, D = 12.5 ± 0.15 mm, CA > 90%

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 25 nmタイプ）

型番一覧（半値幅 25 nmタイプ）

型番	仕様
006-001-1	CWL = 450 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 391-427 nm & 474-510 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-002-1	CWL = 470 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 409-446 nm & 494-532 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-003-1	CWL = 520 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 451-492 nm & 548-590 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-004-1	CWL = 535 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 464-507 nm & 564-607 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-005-1	CWL = 595 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 517-565 nm & 626-673 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-006-1	CWL = 630 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 549-599 nm & 662-712 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-007-1	CWL = 660 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 575-628 nm & 693-745 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-008-1	CWL = 740 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 646-706 nm & 775-834 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-009-1	CWL = 785 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 687-749 nm & 821-884 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-010-1	CWL = 810 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 709-774 nm & 847-912 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-011-1	CWL = 850 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 744-812 nm & 888-956 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-012-1	CWL = 880 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 771-841 nm & 919-990 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-013-1	CWL = 905 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 793-866 nm & 945-1017 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-014-1	CWL = 940 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 824-900 nm & 981-1056 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-015-1	CWL = 375 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 324-354 nm & 397-427 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-016-1	CWL = 400 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 346-378 nm & 422-454 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-017-1	CWL = 425 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 369-403 nm & 448-482 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

型番	仕様
006-018-1	CWL = 475 nm ± 2%, FWHM = 20 nm ± 5 nm, OD2 Blocking ranges = 413-451 nm & 500-538 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-019-1	CWL = 500 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 433-473 nm & 528-568 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-020-1	CWL = 525 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 455-497 nm & 554-596 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-021-1	CWL = 550 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 477-521 nm & 579-623 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-022-1	CWL = 575 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 500-546 nm & 605-651 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-023-1	CWL = 600 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 522-570 nm & 631-679 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-024-1	CWL = 625 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 544-594 nm & 657-707 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-025-1	CWL = 650 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 566-618 nm & 682-734 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-026-1	CWL = 675 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 589-643 nm & 708-762 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-027-1	CWL = 700 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 611-667 nm & 734-790 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-028-1	CWL = 725 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 633-691 nm & 760-818 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-029-1	CWL = 750 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 655-715 nm & 785-845 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-030-1	CWL = 775 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 678-740 nm & 811-873 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-031-1	CWL = 800 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 700-764 nm & 837-901 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-032-1	CWL = 825 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 722-788 nm & 863-929 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-033-1	CWL = 875 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 767-837 nm & 914-984 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-034-1	CWL = 900 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 789-861 nm & 940-1012 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm

EVERIX社製 Ultra-thin 樹脂製光学フィルター
バンドパスパスフィルター（半値幅 25 nmタイプ）

型番一覧（半値幅 25 nmタイプ）

型番	仕様
006-035-1	CWL = 925 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 811-885 nm & 966-1040 nm, D = 12.5 ± 0.15 mm, CA > 90%, Thickness < 0.4 mm
006-036-1	CWL = 950 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 833-909 nm & 991-1067 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-037-1	CWL = 975 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 856-934 nm & 1017-1095 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-038-1	CWL = 1000 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 878-958 nm & 1043-1123 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-039-1	CWL = 1025 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 900-982 nm & 1069-1151 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-040-1	CWL = 1050 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 922-1006 nm & 1094-1178 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-041-1	CWL = 1075 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 945-1031 nm & 1120-1206 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-042-1	CWL = 1100 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 967-1055 nm & 1146-1234 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-043-1	CWL = 1125 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 989-1079 nm & 1172-1262 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-044-1	CWL = 1150 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1011-1103 nm & 1197-1289 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-045-1	CWL = 1175 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1034-1128 nm & 1223-1317 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-046-1	CWL = 1200 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1056-1152 nm & 1249-1345 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-047-1	CWL = 1225 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1078-1176 nm & 1275-1373 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-048-1	CWL = 1250 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1100-1200 nm & 1300-1400 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-049-1	CWL = 1275 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1123-1225 nm & 1326-1428 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-050-1	CWL = 1300 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1145-1249 nm & 1352-1456 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-051-1	CWL = 1325 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1167-1273 nm & 1378-1484 nm, D = 12.5 ± 0.15 mm, CA > 90%

型番	仕様
006-052-1	CWL = 1350 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1189-1297 nm & 1403-1511 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-053-1	CWL = 1375 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1212-1322 nm & 1429-1539 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-054-1	CWL = 1400 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1234-1346 nm & 1455-1567 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-055-1	CWL = 1425 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1256-1370 nm & 1481-1595 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-056-1	CWL = 1450 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1278-1394 nm & 1506-1622 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-057-1	CWL = 1475 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1301-1419 nm & 1532-1650 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-058-1	CWL = 1500 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1323-1443 nm & 1558-1678 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-059-1	CWL = 1525 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1345-1467 nm & 1584-1706 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-060-1	CWL = 1550 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1367-1491 nm & 1609-1733 nm, D = 12.5 ± 0.15 mm, CA > 90%
006-061-1	CWL = 1575 nm ± 2%, FWHM = 25 nm ± 1% @CWL, OD2 Blocking ranges = 1390-1516 nm & 1635-1761 nm, D = 12.5 ± 0.15 mm, CA > 90%

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ノッチフィルター

型番一覧

型番	仕様	数値データ(.csv)
001-001-1	CWL = 405 nm ± 2%, FWHM = 12% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-002-1	CWL = 457 nm ± 2%, FWHM = 12% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-003-1	CWL = 473 nm ± 2%, FWHM = 12% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-004-1	CWL = 488 nm ± 2%, FWHM = 12% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-005-1	CWL = 514 nm ± 2%, FWHM = 10% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-006-1	CWL = 532 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-007-1	CWL = 577 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-008-1	CWL = 633 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-009-1	CWL = 642 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-010-1	CWL = 658 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-011-1	CWL = 685 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-012-1	CWL = 785 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-013-1	CWL = 808 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-014-1	CWL = 980 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-015-1	CWL = 1064 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-016-1	CWL = 405 nm ± 2%, FWHM = 12% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-017-1	CWL = 457 nm ± 2%, FWHM = 12% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download

型番	仕様	数値データ(.csv)
001-018-1	CWL = 473 nm ± 2%, FWHM = 12% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-019-1	CWL = 488 nm ± 2%, FWHM = 12% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-020-1	CWL = 514 nm ± 2%, FWHM = 10% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-021-1	CWL = 532 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-022-1	CWL = 561 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-023-1	CWL = 577 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-024-1	CWL = 594 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-025-1	CWL = 633 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-026-1	CWL = 642 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-027-1	CWL = 647 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-028-1	CWL = 658 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-029-1	CWL = 685 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-030-1	CWL = 785 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-031-1	CWL = 808 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-032-1	CWL = 830 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-033-1	CWL = 980 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-034-1	CWL = 1064 nm ± 2%, FWHM = 8% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ノッチフィルター

型番一覧

型番	仕様	数値データ(.csv)
001-035-1	CWL = 355 nm ± 2%, FWHM = 12% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-036-1	CWL = 561 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-037-1	CWL = 594 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-038-1	CWL = 647 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
001-039-1	CWL = 830 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-040-1	CWL = 1030 nm ± 2%, FWHM = 8% of CWL, OD4 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.4 mm	Download
001-041-1	CWL = 355 nm ± 2%, FWHM = 12% of CWL, OD6 @CWL, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ロングウェーブパスフィルター

型番一覧

型番	仕様	数値データ(.csv)
003-007-1	Cut-on WL = 425 nm ± 2%, OD4 Blocking width = 358-410 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-008-1	Cut-on WL = 450 nm ± 2%, OD4 Blocking width = 379-434 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-009-1	Cut-on WL = 475 nm ± 2%, OD4 Blocking width = 400-459 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-010-1	Cut-on WL = 500 nm ± 2%, OD4 Blocking width = 421-483 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-011-1	Cut-on WL = 525 nm ± 2%, OD4 Blocking width = 442-507 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-012-1	Cut-on WL = 550 nm ± 2%, OD4 Blocking width = 463-531 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-013-1	Cut-on WL = 600 nm ± 2%, OD4 Blocking width = 505-579 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-014-1	Cut-on WL = 650 nm ± 2%, OD4 Blocking width = 547-627 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-015-1	Cut-on WL = 700 nm ± 2%, OD4 Blocking width = 589-676 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-016-1	Cut-on WL = 800 nm ± 2%, OD4 Blocking width = 673-772 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-017-1	Cut-on WL = 825 nm ± 2%, OD4 Blocking width = 694-796 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-018-1	Cut-on WL = 900 nm ± 2%, OD4 Blocking width = 757-869 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-019-1	Cut-on WL = 350 nm ± 2%, OD3 Blocking range = 295-338 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-020-1	Cut-on WL = 375 nm ± 2%, OD3 Blocking range = 316-362 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-021-1	Cut-on WL = 400 nm ± 2%, OD3 Blocking range = 337-386 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-022-1	Cut-on WL = 425 nm ± 2%, OD3 Blocking range = 358-410 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-023-1	Cut-on WL = 475 nm ± 2%, OD3 Blocking range = 400-459 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download

型番	仕様	数値データ(.csv)
003-023-1	Cut-on WL = 475 nm ± 2%, OD3 Blocking range = 400-459 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-024-1	Cut-on WL = 525 nm ± 2%, OD3 Blocking range = 442-507 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-025-1	Cut-on WL = 575 nm ± 2%, OD3 Blocking range = 484-555 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-026-1	Cut-on WL = 625 nm ± 2%, OD3 Blocking range = 526-603 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-027-1	Cut-on WL = 675 nm ± 2%, OD3 Blocking range = 568-652 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-028-1	Cut-on WL = 725 nm ± 2%, OD3 Blocking range = 610-700 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-029-1	Cut-on WL = 750 nm ± 2%, OD3 Blocking range = 631-724 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-030-1	Cut-on WL = 775 nm ± 2%, OD3 Blocking range = 652-748 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-031-1	Cut-on WL = 800 nm ± 2%, OD3 Blocking range = 673-772 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-032-1	Cut-on WL = 825 nm ± 2%, OD3 Blocking range = 694-796 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-033-1	Cut-on WL = 850 nm ± 2%, OD3 Blocking range = 715-821 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-034-1	Cut-on WL = 875 nm ± 2%, OD3 Blocking range = 736-845 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-035-1	Cut-on WL = 900 nm ± 2%, OD3 Blocking range = 757-869 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-036-1	Cut-on WL = 925 nm ± 2%, OD3 Blocking range = 778-893 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-037-1	Cut-on WL = 950 nm ± 2%, OD3 Blocking range = 799-917 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-038-1	Cut-on WL = 975 nm ± 2%, OD3 Blocking range = 820-941 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-039-1	Cut-on WL = 1000 nm ± 2%, OD3 Blocking range = 842-965 nm, D = 12.5 ± 0.15mm, CA > 90%	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ロングウェーブパスフィルター

型番一覧

型番	仕様	数値データ(.csv)
003-040-1	Cut-on WL = 1025 nm ± 2%, OD3 Blocking range = 863-989 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-041-1	Cut-on WL = 1050 nm ± 2%, OD3 Blocking range = 884-1014 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-042-1	Cut-on WL = 1075 nm ± 2%, OD3 Blocking range = 905-1038 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-043-1	Cut-on WL = 1100 nm ± 2%, OD3 Blocking range = 926-1062 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-044-1	Cut-on WL = 1150 nm ± 2%, OD3 Blocking range = 968-1110 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-045-1	Cut-on WL = 1200 nm ± 2%, OD3 Blocking range = 1010-1158 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-046-1	Cut-on WL = 1250 nm ± 2%, OD3 Blocking range = 1052-1207 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-047-1	Cut-on WL = 1300 nm ± 2%, OD3 Blocking range = 1094-1255 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-048-1	Cut-on WL = 1350 nm ± 2%, OD3 Blocking range = 1136-1303 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-049-1	Cut-on WL = 1400 nm ± 2%, OD3 Blocking range = 1178-1351 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-050-1	Cut-on WL = 1450 nm ± 2%, OD3 Blocking range = 1220-1400 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-051-1	Cut-on WL = 1500 nm ± 2%, OD3 Blocking range = 1262-1448 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-052-1	Cut-on WL = 1550 nm ± 2%, OD3 Blocking range = 1304-1496 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-053-1	Cut-on WL = 350 nm ± 2%, OD4 Blocking width = 295-338 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-054-1	Cut-on WL = 375 nm ± 2%, OD4 Blocking width = 316-362 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-055-1	Cut-on WL = 400 nm ± 2%, OD4 Blocking width = 337-386 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-056-1	Cut-on WL = 575 nm ± 2%, OD4 Blocking width = 484-555 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download

型番	仕様	数値データ(.csv)
003-057-1	Cut-on WL = 625 nm ± 2%, OD4 Blocking width = 526-603 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-058-1	Cut-on WL = 675 nm ± 2%, OD4 Blocking width = 568-652 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-059-1	Cut-on WL = 725 nm ± 2%, OD4 Blocking width = 610-700 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-060-1	Cut-on WL = 750 nm ± 2%, OD4 Blocking width = 631-724 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-061-1	Cut-on WL = 775 nm ± 2%, OD4 Blocking width = 652-748 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-062-1	Cut-on WL = 850 nm ± 2%, OD4 Blocking width = 715-821 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-063-1	Cut-on WL = 875 nm ± 2%, OD4 Blocking width = 736-845 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-064-1	Cut-on WL = 925 nm ± 2%, OD4 Blocking width = 778-893 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-065-1	Cut-on WL = 950 nm ± 2%, OD4 Blocking width = 799-917 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-066-1	Cut-on WL = 975 nm ± 2%, OD4 Blocking width = 820-941 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-067-1	Cut-on WL = 1000 nm ± 2%, OD4 Blocking width = 842-965 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-068-1	Cut-on WL = 1025 nm ± 2%, OD4 Blocking width = 863-989 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-069-1	Cut-on WL = 1050 nm ± 2%, OD4 Blocking width = 884-1014 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-070-1	Cut-on WL = 1075 nm ± 2%, OD4 Blocking width = 905-1038 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-071-1	Cut-on WL = 1100 nm ± 2%, OD4 Blocking width = 926-1062 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-072-1	Cut-on WL = 1150 nm ± 2%, OD4 Blocking width = 968-1110 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-073-1	Cut-on WL = 1200 nm ± 2%, OD4 Blocking width = 1010-1158 nm, D = 12.5 ± 0.15mm, CA > 90%	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ロングウェーブパスフィルター

型番一覧

型番	仕様	数値データ(.csv)
003-074-1	Cut-on WL = 1250 nm ± 2%, OD4 Blocking width = 1052-1207 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-075-1	Cut-on WL = 1300 nm ± 2%, OD4 Blocking width = 1094-1255 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-076-1	Cut-on WL = 1350 nm ± 2%, OD4 Blocking width = 1136-1303 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-077-1	Cut-on WL = 1400 nm ± 2%, OD4 Blocking width = 1178-1351 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-078-1	Cut-on WL = 1450 nm ± 2%, OD4 Blocking width = 1220-1400 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-079-1	Cut-on WL = 1500 nm ± 2%, OD4 Blocking width = 1262-1448 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-080-1	Cut-on WL = 1550 nm ± 2%, OD4 Blocking width = 1304-1496 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
003-081-1	Cut-on WL = 450 nm ± 2%, OD3 Blocking range = 379-434 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-082-1	Cut-on WL = 500 nm ± 2%, OD3 Blocking range = 421-483 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-083-1	Cut-on WL = 550 nm ± 2%, OD3 Blocking range = 463-531 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-084-1	Cut-on WL = 600 nm ± 2%, OD3 Blocking range = 505-579 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-085-1	Cut-on WL = 650 nm ± 2%, OD3 Blocking range = 547-627 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download
003-086-1	Cut-on WL = 700 nm ± 2%, OD3 Blocking range = 589-676 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness <0.3 mm	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ショートウェーブパスフィルター

型番一覧

型番	仕様	数値データ(.csv)
002-007-1	Cut-off WL = 475 nm ± 2%, OD4 Blocking range = 492-547 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-008-1	Cut-off WL = 500 nm ± 2%, OD4 Blocking range = 518-576 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-009-1	Cut-off WL = 550 nm ± 2%, OD4 Blocking range = 569-633 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-010-1	Cut-off WL = 600 nm ± 2%, OD4 Blocking range = 621-691 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-011-1	Cut-off WL = 625 nm ± 2%, OD4 Blocking range = 647-720 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-012-1	Cut-off WL = 650 nm ± 2%, OD4 Blocking range = 673-748 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-013-1	Cut-off WL = 675 nm ± 2%, OD4 Blocking range = 699-777 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-014-1	Cut-off WL = 700 nm ± 2%, OD4 Blocking range = 725-806 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-015-1	Cut-off WL = 750 nm ± 2%, OD4 Blocking range = 776-864 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-016-1	Cut-off WL = 800 nm ± 2%, OD4 Blocking range = 828-921 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-017-1	Cut-off WL = 850 nm ± 2%, OD4 Blocking range = 880-979 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-018-1	Cut-off WL = 900 nm ± 2%, OD4 Blocking range = 932-1036 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-019-1	Cut-off WL = 400 nm ± 2%, OD3 Blocking range = 414-461 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-020-1	Cut-off WL = 425 nm ± 2%, OD3 Blocking range = 440-489 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-021-1	Cut-off WL = 450 nm ± 2%, OD3 Blocking range = 466-518 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-022-1	Cut-off WL = 475 nm ± 2%, OD3 Blocking range = 492-547 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-023-1	Cut-off WL = 525 nm ± 2%, OD3 Blocking range = 544-605 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-024-1	Cut-off WL = 575 nm ± 2%, OD3 Blocking range = 595-662 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download

型番	仕様	数値データ(.csv)
002-025-1	Cut-off WL = 625 nm ± 2%, OD3 Blocking range = 647-720 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-026-1	Cut-off WL = 675 nm ± 2%, OD3 Blocking range = 699-777 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-027-1	Cut-off WL = 725 nm ± 2%, OD3 Blocking range = 751-835 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-028-1	Cut-off WL = 775 nm ± 2%, OD3 Blocking range = 802-892 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-029-1	Cut-off WL = 800 nm ± 2%, OD3 Blocking range = 828-921 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-030-1	Cut-off WL = 825 nm ± 2%, OD3 Blocking range = 854-950 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-031-1	Cut-off WL = 850 nm ± 2%, OD3 Blocking range = 880-979 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-032-1	Cut-off WL = 875 nm ± 2%, OD3 Blocking range = 906-1008 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-033-1	Cut-off WL = 900 nm ± 2%, OD3 Blocking range = 932-1036 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-034-1	Cut-off WL = 925 nm ± 2%, OD3 Blocking range = 958-1065 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-035-1	Cut-off WL = 950 nm ± 2%, OD3 Blocking range = 984-1094 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-036-1	Cut-off WL = 975 nm ± 2%, OD3 Blocking range = 1009-1123 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-037-1	Cut-off WL = 1000 nm ± 2%, OD3 Blocking range = 1035-1152 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-038-1	Cut-off WL = 1025 nm ± 2%, OD3 Blocking range = 1061-1180 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-039-1	Cut-off WL = 1050 nm ± 2%, OD3 Blocking range = 1087-1209 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-040-1	Cut-off WL = 1075 nm ± 2%, OD3 Blocking range = 1113-1238 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-041-1	Cut-off WL = 1100 nm ± 2%, OD3 Blocking range = 1139-1267 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-042-1	Cut-off WL = 1150 nm ± 2%, OD3 Blocking range = 1191-1324 nm, D = 12.5 ± 0.15mm, CA > 90%	Download

EVERIX社製 Ultra-thin 樹脂製光学フィルター
ショートウェーブパスフィルター

型番一覧

型番	仕様	数値データ(.csv)
002-043-1	Cut-off WL = 1200 nm ± 2%, OD3 Blocking range = 1242-1382 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-044-1	Cut-off WL = 1250 nm ± 2%, OD3 Blocking range = 1294-1439 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-045-1	Cut-off WL = 1300 nm ± 2%, OD3 Blocking range = 1346-1497 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-046-1	Cut-off WL = 1350 nm ± 2%, OD3 Blocking range = 1398-1555 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-047-1	Cut-off WL = 1400 nm ± 2%, OD3 Blocking range = 1449-1612 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-048-1	Cut-off WL = 400 nm ± 2%, OD4 Blocking range = 414-461 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-049-1	Cut-off WL = 425 nm ± 2%, OD4 Blocking range = 440-489 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-050-1	Cut-off WL = 450 nm ± 2%, OD4 Blocking range = 466-518 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-051-1	Cut-off WL = 525 nm ± 2%, OD4 Blocking range = 544-605 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-052-1	Cut-off WL = 575 nm ± 2%, OD4 Blocking range = 595-662 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-053-1	Cut-off WL = 725 nm ± 2%, OD4 Blocking range = 751-835 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-054-1	Cut-off WL = 775 nm ± 2%, OD4 Blocking range = 802-892 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-055-1	Cut-off WL = 825 nm ± 2%, OD4 Blocking range = 854-950 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-056-1	Cut-off WL = 875 nm ± 2%, OD4 Blocking range = 906-1008 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-057-1	Cut-off WL = 925 nm ± 2%, OD4 Blocking range = 958-1065 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-058-1	Cut-off WL = 950 nm ± 2%, OD4 Blocking range = 984-1094 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-059-1	Cut-off WL = 975 nm ± 2%, OD4 Blocking range = 1009-1123 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-060-1	Cut-off WL = 1000 nm ± 2%, OD4 Blocking range = 104-115 nm, D = 12.5 ± 0.15mm, CA > 90%	Download

型番	仕様	数値データ(.csv)
002-061-1	Cut-off WL = 1025 nm ± 2%, OD4 Blocking range = 106-117 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-062-1	Cut-off WL = 1050 nm ± 2%, OD4 Blocking range = 1087-1209 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-063-1	Cut-off WL = 1075 nm ± 2%, OD4 Blocking range = 1113-1238 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-064-1	Cut-off WL = 1100 nm ± 2%, OD4 Blocking range = 1139-1267 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-065-1	Cut-off WL = 1150 nm ± 2%, OD4 Blocking range = 1191-1324 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-066-1	Cut-off WL = 1200 nm ± 2%, OD4 Blocking range = 1242-1382 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-067-1	Cut-off WL = 1250 nm ± 2%, OD4 Blocking range = 1294-1439 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-068-1	Cut-off WL = 1300 nm ± 2%, OD4 Blocking range = 1346-1497 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-069-1	Cut-off WL = 1350 nm ± 2%, OD4 Blocking range = 1398-1555 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-070-1	Cut-off WL = 1400 nm ± 2%, OD4 Blocking range = 1449-1612 nm, D = 12.5 ± 0.15mm, CA > 90%	Download
002-071-1	Cut-off WL = 500 nm ± 2%, OD3 Blocking range = 518-576 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-072-1	Cut-off WL = 550 nm ± 2%, OD3 Blocking range = 569-633 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-073-1	Cut-off WL = 600 nm ± 2%, OD3 Blocking range = 621-691 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-074-1	Cut-off WL = 650 nm ± 2%, OD3 Blocking range = 673-748 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-075-1	Cut-off WL = 700 nm ± 2%, OD3 Blocking range = 725-806 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download
002-076-1	Cut-off WL = 750 nm ± 2%, OD3 Blocking range = 776-864 nm, D = 12.5 ± 0.15mm, CA > 90%, Thickness < 0.3 mm	Download